



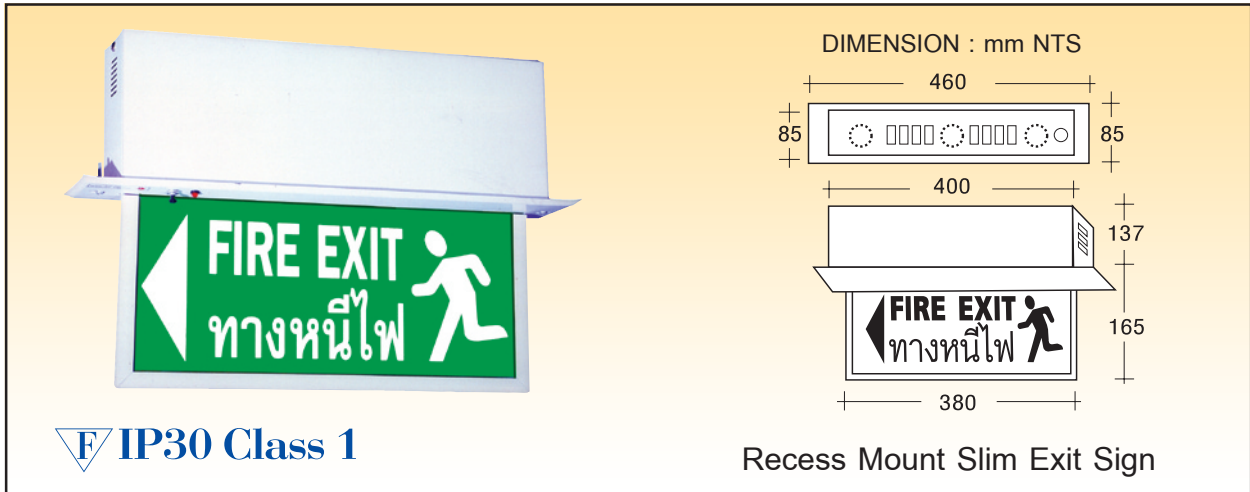

MICRO POWER
SELF-CONTAINED EMERGENCY EXIT SIGN
 SERIES : SLR-PL



This Recess-Mounted Exit Sign is designed with the control gear being mounted behind the ceiling. Only an elegant slim plate with the printed legend is visible. The gear tray is removable and is independent of the housing to facilitate ease installation, maintenance and replacement of lamps. It also function as a reflector to increase light output and homogenous light distribution.

SPECIFICATIONS

MODE OF OPERATION	:	<input type="checkbox"/> MAINTAINED
LAMP	:	<input type="checkbox"/> 1 X 11W. PL 4PIN LAMP
RATE DURATION	:	2 HRS & OTHERS
MAIN SUPPLY	:	220 VOLT, 50Hz & OTHERS
POWER CONSUMPTION	:	4VA / 13VA
BATTERY	:	HIGH TEMP NICKLE CADMIUM
CHARGER	:	AUTOMATIC CONSTANT CURRENT
CHARGER MONITOR	:	RED L.E.D. Ø 5mm.
TEST FACILITY	:	MICRO SWITCH
SAFETY FEATURE	:	LOW VOLT CUT-OFF PREVENTING BATTERY OVER DISCHARGE
FITTING CONSTRUCTION	:	ELECTRO GALVANISED STEEL WITH EPOXY POWDER COATING
DIFFUSER	:	FIRE RETARDANT ACRYLIC
LEGEND	:	ISO GREEN, OTHER LEGEND OPTIONAL
MOUNTING	:	RECESS MOUNTED
CABLE ENTRY	:	Ø 20mm. K/O HOLE
COMPLIANCE	:	IEC 598-2-22

MODEL	BATTERY	LAMP (WATT)	SIDE	DURATION	WEIGHT (GROSS)
SLR S1FL10N	NI-CD HI-TEMP 2.4V4.0Ah	FLUORESCENT 1 X 10W.	SINGLE	2 HOURS	3.0 KG.
SLR D1FL10N	NI-CD HI-TEMP 2.4V4.0Ah	FLUORESCENT 1 X 10W.	DOUBLE	2 HOURS	3.0 KG.