




**MICRO POWER**  
**SELF-CONTAINED EMERGENCY LIGHT**  
 SERIES : MP12-26



**BATTERY**  
**ISO 9002**

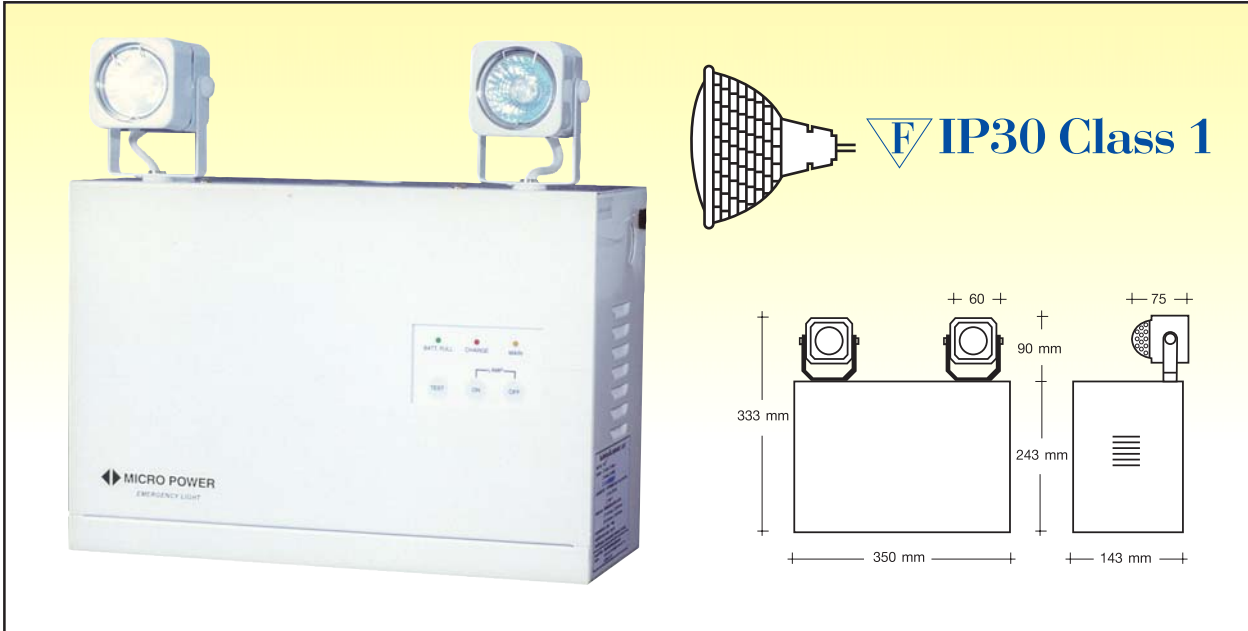

## SPECIFICATIONS

INPUT VOLTAGE	:	220 V AC/50Hz +/-10%
TYPE OF BATTERY	:	SEALED LEAD ACID
LAMP USED	:	SEALED DICHROIC TUNGSTEN HALOGEN
MODE OF OPERATION	:	NON MAINTAINED
OPERATING TEMPERATURE	:	Ta 40 C
CHARGER	:	TWO STEP CONSTANT VOLTAGE & CURRENT LIMIT
		1 st STEP.....14.20V - 14.50V
		2 nd STEP.....13.40V - 13.60V
CHARGER CURRENT	:	LIMITS CURRENT TO 100% OF FULL LOAD
		CURRENT DOWN TO SHORT CIRCUIT CONDITION
PROTECTION	:	AC.FUSE / DC.FUSE / LOW VOLTAGE CUT OFF TO
		PREVENT BATTERY OVER DISCHARGE
CONSTRUCTION	:	ELECTRO GALVANISED STEEL CASE EPOXY POWER COATED
COMPLIANCE	:	IEC. 598-2-22

MODEL	BATTERY SEALED LEAD ACID	LAMP HEAD	LAMP WATT	DURATION	WEIGHT
MP12-26CS 35-2	12V - 26Ah	SQUARE	2 x 35 W.	3 HR.30MIN	14 KG.
MP12-26CS 50-2	12V - 26Ah	SQUARE	2 x 50 W.	2 HR.	14 KG.