



MICRO POWER
EMERGENCY POWER PACK
 SERIES : PP12-1800



BATTERY
ISO 9002



SPECIFICATIONS

INPUT VOLTAGE	:	220 V AC/50Hz +/-10%
BATTERY	:	12V. 1.8Ah HIGH TEMP NICKEL CADMIUM
BACK UP TIME	:	1 HOUR FOR 1X20W. 2 HOUR FOR 1X10W.
MODE	:	MAINTAINED / NON MAINTAINED
POWER CONSUMPTION	:	<25VA / >5VA
CHARGER	:	CONSTANT CURRENT
PROTECTION	:	LOW VOLT CUT OFF TO PREVENT BATTERY OVER DISCHARGE AC.FUSE , DC. CHARGER FUSE, BATTERY OUT PUT FUSE
GROSS WEIGHT	:	1.7 KG.


MODEL INFORMATION
 FOR EXAMPLE : MODEL PP12-1800 NI MT CT

PP	12	1800	NI	MT	CT
POWER PACK	BATT. VOLTAGE 12 VOLT	BATT. CAPACITY 1800 mAh	BATT.TYPE NI=SEALED NI-CD SL=LEAD ACID	MODE MT=MAINTAINED NM=NON- MAINTAINED	TRANSFORMER TYPE CT= CONVENTIONAL EL = ELECTRONICS

MICRO POWER EMERGENCY POWER PACK

BLOCK DIAGRAM

PP12-1800 NI-MT-ET
PP12-1800 NI-MT-CT

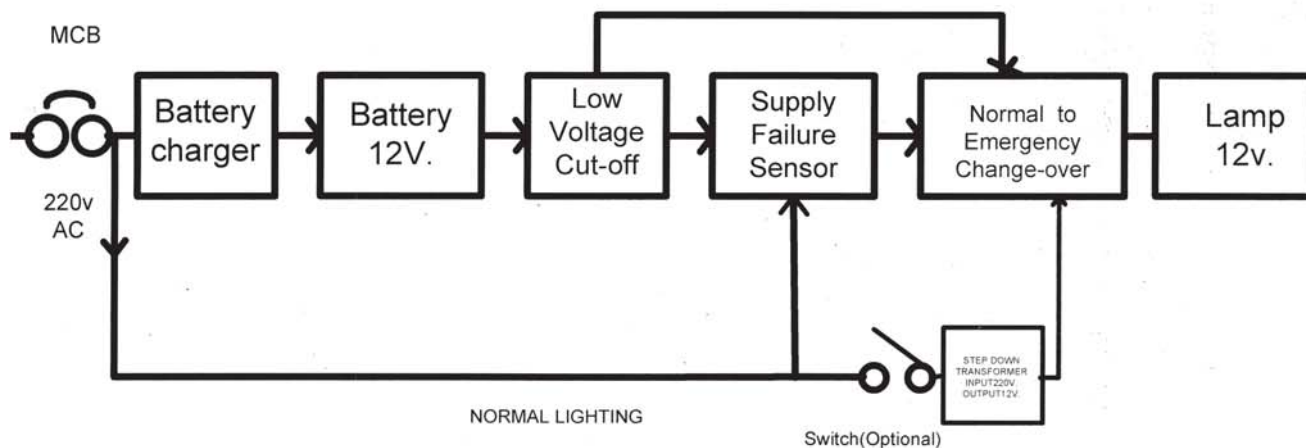

MODEL INFORMATION

PP	12	1800	NI	MT (NM)	CT (ET)
POWER PACK	BATT VOLTAGE	BATT. CAPACITY	BATT. TYPE NI=SEALED NI-CD SL=SEALED LEAD ACID	MODE MT=MAINTAINED NM=NONMAINTAINED	TRANSFORMER TYPE CT=CONVENTIONAL ET=ELECTRONICS

