




MICRO POWER
SELF-CONTAINED EMERGENCY EXIT SIGN
 SERIES : ELS-PL



BATTERY
ISO 9002

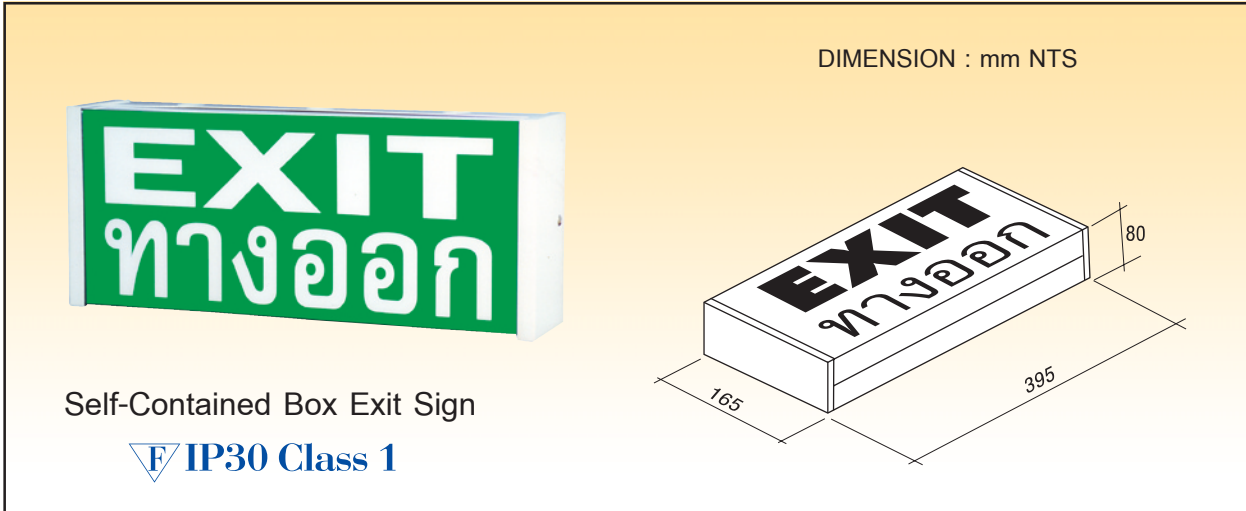

The gear tray that is removable and is independent of the housing to facilitate ease of installation, maintenance and replacement of lamps. It also functions as a reflector to increase light output and Homogenous Light Distribution.

SPECIFICATIONS

| | | | |
|----------------------|---|---|--|
| MODE OF OPERATION | : | <input type="checkbox"/> MAINTAINED | <input type="checkbox"/> SUSTAINED |
| LAMP | : | <input type="checkbox"/> 1 X 11W. | <input type="checkbox"/> 2 X 11W. PL 4PIN LAMP |
| RATE DURATION | : | 2 HRS & OTHERS | |
| MAIN SUPPLY | : | 220 VOLT, 50Hz & OTHERS | |
| POWER CONSUMPTION | : | 4VA / 13VA | |
| BATTERY | : | HIGH TEMP NICKLE CADMIUM | |
| CHARGER | : | AUTOMATIC CONSTANT CURRENT | |
| CHARGER MONITOR | : | RED L.E.D. Ø 5mm. | |
| TEST FACILITY | : | MICRO SWITCH | |
| SAFETY FEATURE | : | LOW VOLT CUT-OFF PREVENTING BATTERY OVER DISCHARGE | |
| FITTING CONSTRUCTION | : | ELECTRO GALVANISED STEEL WITH EPOXY POWDER COATING | |
| DIFFUSER | : | FIRE RETARDANT MOULDED ACRYLIC | |
| LEGEND | : | ISO GREEN, OTHER LEGEND OPTIONAL | |
| MOUNTING | : | WALL OR CEILING | |
| CABLE ENTRY | : | Ø 20mm. K/O HOLE | |
| COMPLIANCE | : | ICE 598-2-22 | |

| MODEL | BATTERY | LAMP (WATT) | SIDE | DURATION | WEIGHT (GROSS) |
|-----------|----------------------------|-------------------------|--------|----------|----------------|
| ELS 1FL10 | NI-CD HI-TEMP 2.4V4.0Ah | FLUORESCENT 1 X 10W. | SINGLE | 2 HOURS | 3.0 KG. |