




**MICRO POWER**  
**SELF-CONTAINED EMERGENCY LIGHT**  
 SERIES : MP12-18



**BATTERY**  
**ISO 9002**

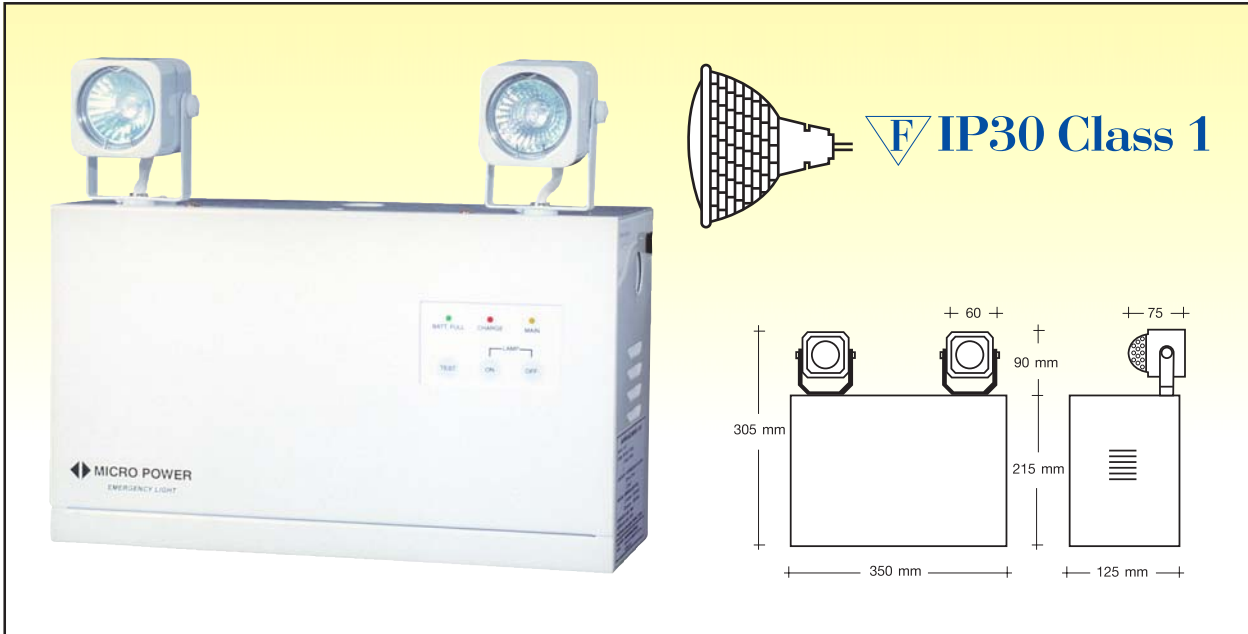

## SPECIFICATIONS

- INPUT VOLTAGE : 220 V AC/50Hz +/-10%
- TYPE OF BATTERY : SEALED LEAD ACID
- LAMP USED : SEALED DICHROIC TUNGSTEN HALOGEN
- MODE OF OPERATION : NON MAINTAINED
- OPERATING TEMPERATURE : Ta 40 C
- CHARGER : TWO STEP CONSTANT VOLTAGE & CURRENT LIMIT  
 1 st STEP.....14.20V - 14.50V  
 2 nd STEP.....13.40V - 13.60V
- CHARGER CURRENT : LIMITS CURRENT TO 100% OF FULL LOAD  
 CURRENT DOWN TO SHORT CIRCUIT CONDITION
- PROTECTION : AC.FUSE / DC.FUSE / LOW VOLTAGE CUT OFF TO  
 PREVENT BATTERY OVER DISCHARGE
- CONSTRUCTION : ELECTRO GALVANISED STEEL CASE EPOXY POWER COATED
- COMPLIANCE : IEC. 598-2-22

MODEL	BATTERY SEALED LEAD ACID	LAMP HEAD	LAMP WATT	DURATION	WEIGHT
MP12-18CS 20-2	12V - 18Ah	SQUARE	2 x 20 W.	4 HR.	10 KG.
MP12-18CS 35-2	12V - 18Ah	SQUARE	2 x 35 W.	2 HR.30MIN	10 KG.
MP12-18CS 50-2	12V - 18Ah	SQUARE	2 x 50 W.	1 HR.30MIN	10 KG.