




MICRO POWER
SELF-CONTAINED EMERGENCY EXIT SIGN
 SERIES : ELD-PL



BATTERY
ISO 9002

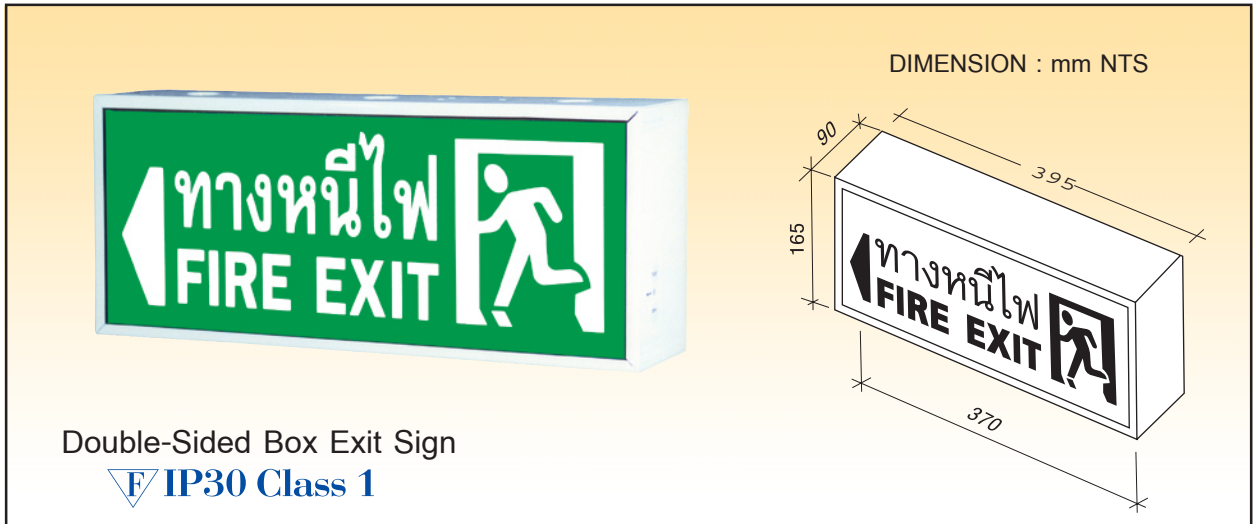

This Double-Sided Exit Sign is specially designed with a gear tray which is removable and is independent of the housing to facilitate ease installation, maintenance and replacement of lamps. It also enhances the Slim Construction of the Box and at the same time provides even and Homogenous Light Distribution.

SPECIFICATIONS

- MODE OF OPERATION : MAINTAINED SUSTAINED
- LAMP : 1 X 11W. 2X11W. PL 4PIN LAMP
- RATE DURATION : 2 HRS & OTHERS
- MAIN SUPPLY : 220 VOLT, 50Hz & OTHERS
- POWER CONSUMPTION : 4VA / 13VA
- BATTERY : HIGH TEMP NICKLE CADMIUM
- CHARGER : AUTOMATIC CONSTANT CURRENT
- CHARGER MONITOR : RED L.E.D. Ø 5mm.
- TEST FACILITY : MICRO SWITCH
- SAFETY FEATURE : LOW VOLT CUT-OFF PREVENTING BATTERY OVER DISCHARGE
- FITTING CONSTRUCTION : ELECTRO GALVANISED STEEL WITH EPOXY POWDER COATING
- DIFFUSER : FIRE RETARDANT MOULDED ACRYLIC
- LEGEND : ISO GREEN, OTHER LEGEND OPTIONAL
- MOUNTING : WALL OR CEILING
- CABLE ENTRY : Ø 20mm. K/O HOLE
- COMPLIANCE : CP19, SS263 : PART 2, ICE 598-2-22

MODEL	BATTERY	LAMP (WATT)	SIDE	DURATION	WEIGHT (GROSS)
ELD 1FL10N	NI-CD HI-TEMP 2.4V4.0Ah	FLUORESCENT 1 X 10W.	DOUBLE	2 HOURS	3.0 KG.